

Diagram illustrating a laser system 100. A laser assembly 5 is connected via a fiber 6 to a rectangular chamber 2. Inside the chamber, a beam splitter 3 reflects a beam from a source LA (labeled PB) downwards. A detector 4 is positioned on the right side of the chamber. The output of the chamber is labeled IL.

Fig.3.

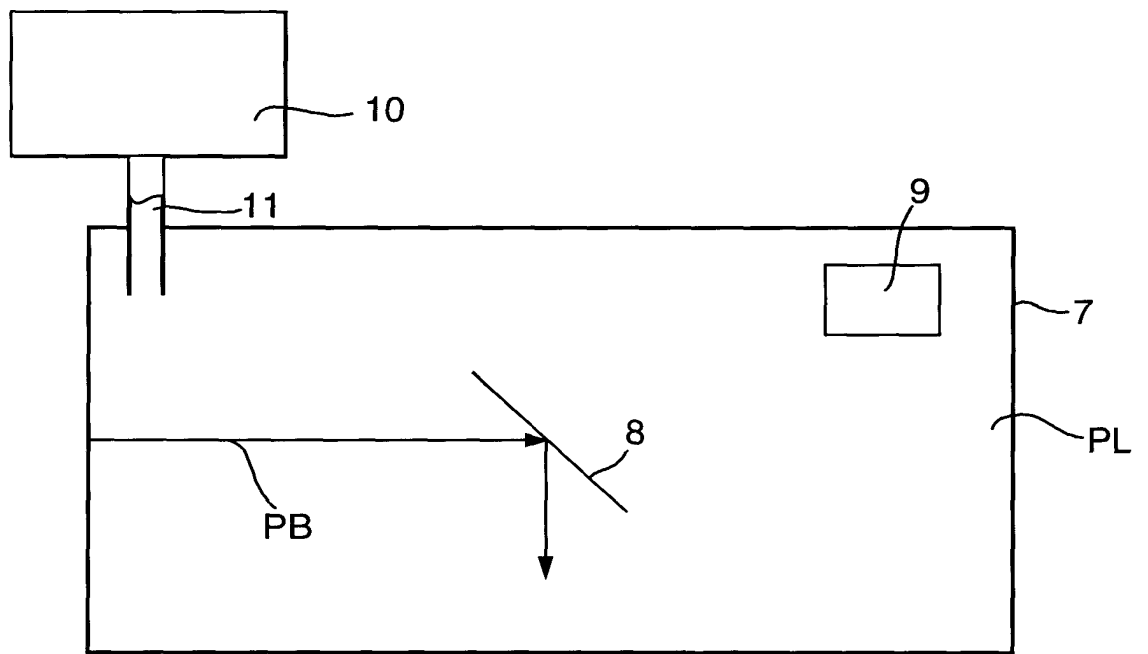


FIG. 3